


NASA/TM-2003-212447



An Analysis of Measured Sonic-Boom Pressure Signatures From a Langley Wind-Tunnel Model of a Supersonic-Cruise Business Jet Concept

Robert J. Mack
Langley Research Center, Hampton, Virginia

October 2003

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the lead center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:


- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA counterpart of peer-reviewed formal professional papers, but having less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.
- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or co-sponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results ... even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA STI Help Desk at (301) 621-0134
- Phone the NASA STI Help Desk at (301) 621-0390
- Write to:
NASA STI Help Desk
NASA Center for AeroSpace Information
7121 Standard Drive
Hanover, MD 21076-1320

NASA/TM-2003-212447



An Analysis of Measured Sonic-Boom Pressure Signatures From a Langley Wind-Tunnel Model of a Supersonic-Cruise Business Jet Concept

Robert J. Mack
Langley Research Center, Hampton, Virginia

National Aeronautics and
Space Administration

Langley Research Center
Hampton, Virginia 23681-2199

October 2003

Available from:

NASA Center for AeroSpace Information (CASI)
7121 Standard Drive
Hanover, MD 21076-1320
(301) 621-0390

National Technical Information Service (NTIS)
5285 Port Royal Road
Springfield, VA 22161-2171
(703) 605-6000

Summary

Pressure signatures generated by the wind-tunnel model of a business-jet concept were measured at a Mach number of 2, at separation distances of 9.5 and 18 inches, and at $C_L/C_{L,CR}$ ratios of 0.5 and 1.0. An analysis of the data showed that the engine-nacelle disturbances were just as difficult to “hide” in the flow-field expansion region of a supersonic-cruise business jet as they were in the same flow-field expansion region of a 300-passenger supersonic-cruise transport. So, while the beginning-cruise weight was lower, the reduced lift resulted in a shallower expansion leading to the formation of the tail shock. This result was the basis of the conclusion that it was more, not less, difficult to tailor the concept’s geometry for sonic boom overpressures that were half those required of the much larger transport aircraft. In spite of this result, however, the predicted strength of the nacelle shock in the ground signature was so low that it would probably be unnoticed by the observer.

Introduction

A supersonic-cruise business jet (SBJ) concept was designed at the Langley Research Center to aid in assessing the scope of supersonic-cruise technical problems. These special technical problems were associated with applying low/reduced-boom methods and aircraft technologies to the design of supersonic-cruise vehicles that were considerably smaller than the Supersonic Transport (SST) or the High Speed Civil Transport (HSCT); vehicles that had been the subject of intense study from the late 1960’s through the 1990’s. It was thought that due to its reduced size and weight, a low-boom SBJ would be easier to design than its HSCT counterpart.

A wind-tunnel model was derived and built from the geometry of the SBJ concept. Pressure signatures generated by the model in the wind tunnel were measured at the design Mach number and used to assess the applicability of existing design and analysis methods.

In this report, pressure signatures generated by the Langley Low Sonic Boom Business Jet Wind-Tunnel model and measured in the Langley Research Center’s Unitary Plan Wind Tunnel are presented and analyzed. The results of the analyses were used to determine the level of success in achieving the desired design goals for this type of configuration.

Nomenclature

A_E	equivalent area, ft ²
b	wing span, feet
C_L	cruise or takeoff lift coefficient
$C_{L,CR}$	cruise lift coefficient
$F(y)$	Whitham F-function of parameter y , ft ^{1/2}
h	cruise altitude, ft
l_e	effective length of the aircraft, ft
M	cruise Mach number
p	ambient pressure, psf
Δp	overpressure in the aircraft's flow field, psf
W_c	aircraft weight at start of cruise, lb
W_{eff}	aircraft weight used to calculate a low-boom F-function and equivalent areas, lb
x	distance along the longitudinal direction, ft
x_e	effective distance along the longitudinal direction, ft
y	spanwise direction or Whitham F-function effective length parameter, ft
β	Mach number parameter defined by $(M^2 - 1.0)^{1/2}$
ξ	length to end of constant $F(y)$ section on a hybrid Whitham F-function, ft
η	ratio of F-function "ramp" slope to the acoustic signal slope
λ	length of the positive section of the low-boom F-function, ft

Conceptual Configuration

The low-boom features on the business-jet concept, reference 1, were guided by the sonic-boom minimization theory of Seebass and George, reference 2. This minimization theory was a refinement of an initial minimization work of Jones, reference 3, based on the pioneer flow-field prediction research of Whitham and Walkden, references 4 and 5.

These theories along with experimental evidence were the basis of McLean's conclusions, reference 6, which noted that special tailoring of the aircraft's geometry could extend the benefits of pressure-signature shaping farther into the aircraft's supersonic flow field than previously suspected. Subsequent studies, reference 7 for instance, applied these ideas to early low-boom transport concepts. Refinements in methods and applications (references 8 to 13 are typical) followed, and were in place during the HSCT concept design studies. All these low sonic-boom design methods, fuselage-tailoring methods, and sonic-boom analysis techniques were available and employed to design the Langley low-boom business-jet concept.

The preliminary design of the Langley business jet concept had the following low-sonic-boom and mission objectives:

Range	=	4000 nmi
Cruise Mach Number	=	2.0
Number of Passengers	=	10
Number of Crew	=	2
Maximum Nose/Tail Shock Overpressure	=	0.5 psf or less
Number of Engines	=	2

Beginning-cruise weight was estimated using the method of reference 14. This estimate required an initial wing planform and its performance characteristics, the mission objectives, and the propulsion system's cruise performance. From a beginning-cruise altitude, the cruise Mach number, and a beginning-cruise weight, the desired ground overpressure was estimated.

Supersonic-cruise aerodynamic performance characteristics of lift, drag, and pitching moment were obtained by using the methods and codes described in references 15 to 17. The method of reference 18 was used to obtain nacelle F-functions. An independent code was developed and used to obtain estimates of the configuration skin friction drag. These analysis tools, as well as those previously mentioned were used to design the Langley low-boom business jet concept shown in figure 1. Low-boom inputs, equivalent area distribution (without nacelles), and the low-boom F-function of the Langley low-boom concept are found in Appendix A.

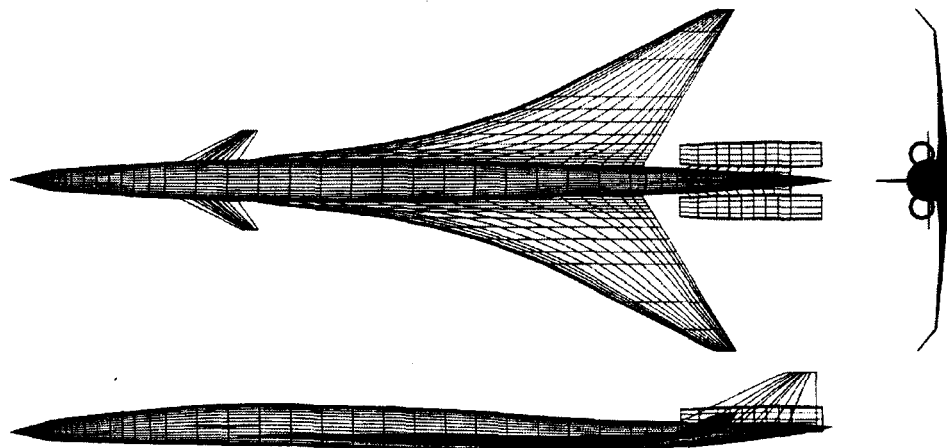


Figure 1. Three-view drawing of the Langley concept.

Wind-Tunnel Model

The wind-tunnel model which would be used to generate pressure signatures was derived from the design of the Langley supersonic-cruise low-sonic-boom business jet concept. A scale factor of 1:100 was used to obtain the model from full-scale dimensions. The Langley low-boom wind-tunnel model is shown in figures 2 and 3.

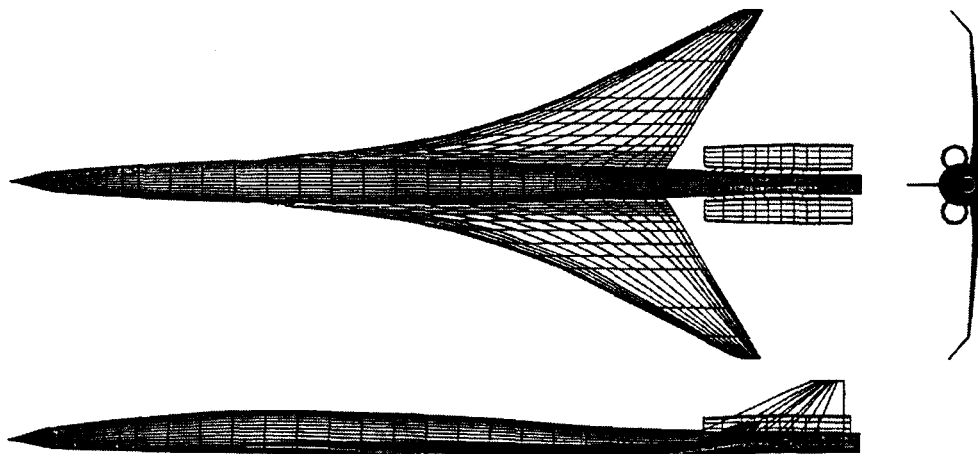


Figure 2. Three-view sketch of the Langley low-boom wind-tunnel model; small nacelles.

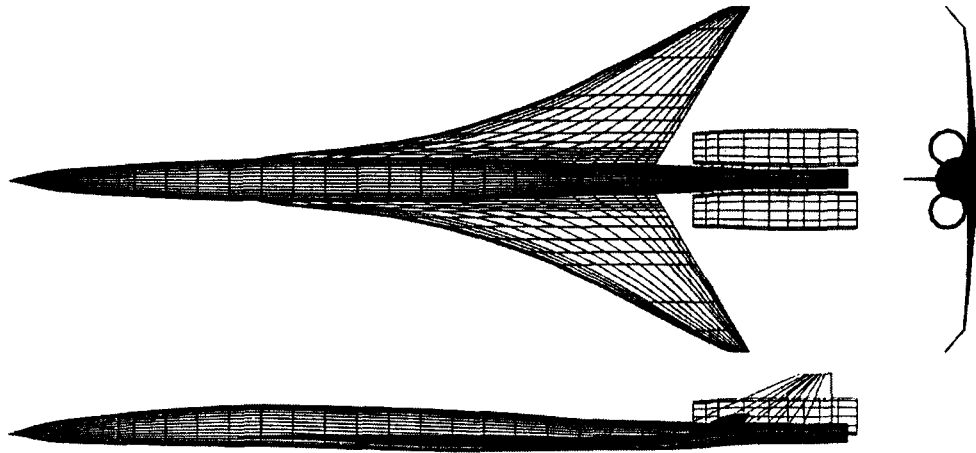


Figure 3. Three-view sketch of the Langley low-boom wind-tunnel model; large nacelles.

Two different nacelles were built for the same wing/fuselage/fin/nacelle strut model. They represented the nacelles required for engines having two bypass ratios. The inlet of both nacelles are at the same longitudinal station, but the larger nacelle's lateral position was changed so that the nacelle strut span was the same for both nacelles. These permitted the evaluation of the disturbances from nacelles of engines incorporating different technology developments, different noise-suppression techniques, and/or different life-expectancy requirements.

Only the model and the cylindrical section aft of the fuselage are shown in figures 2 and 3. The cylindrical aft fuselage replaces the body closure on the full-scale configuration and blends into a tapered sting-balance which extended the integrated model-sting-balance to 32 inches in length. This tapered sting-balance section is not shown so that configuration features can be easily seen in the figures. Note that the canard on the full-scale concept was not on the wind-tunnel model. Pressure signatures were to be measured at several angles of attack (several levels of lift) and the canard was to carry zero lift during supersonic flight. To maintain the canard at zero lift on the model, a canard attitude adjustment mechanism would have been needed necessitating undesired model complexity or manual adjustment for each lift setting.

The canard volume was not replaced with fuselage volume to keep the fuselage from being "lumpy" where the canard was located. This meant that the concept's Whitham F-function would not be smooth along the section between the nose "spike" and the onset of wing lift as if the canard were in place. However, the changed equivalent areas could be input to the prediction codes for obtaining a predicted pressure signature of the model's nose, forebody, and forward strake where the disturbances were mainly from volume (ANALYSIS section). Configuration dimensions and qualities which were scaled by a factor of 1:100 are found in Appendix B.

Wind-Tunnel Test Section and Test Matrix

The wind-tunnel model was mounted on an angle-of-attack mechanism which permitted remote control of the lift on the model during the measurement of pressure signatures. The angle of attack mechanism, in turn, was connected by a sting to the main lateral and longitudinal motion strut in Test Section No. 1 of the Langley Unitary Plan Wind Tunnel. Thus, both model lift and separation distance could be changed by remote control during the test runs.

A side-view schematic of this model-probe arrangement is shown in figure 4.

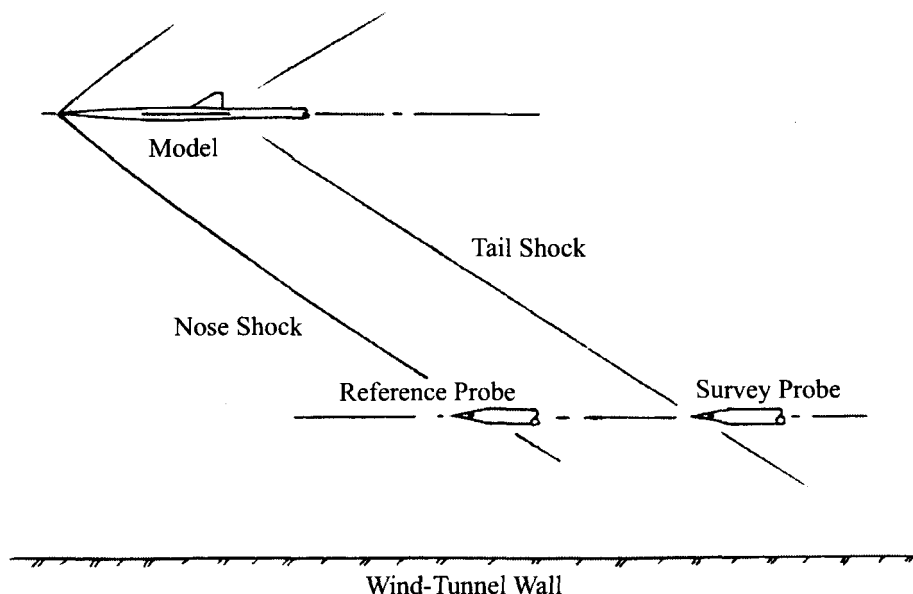


Figure 4. Side-view schematic of model and measurement probes in the test section.

The reference and survey probes were cylindrical with a 4 degree vertex angle conical tip. Each tip had two, opposed, 0.035 inch diameter orifices. Both were mounted on masts which kept them outside the wind-tunnel-wall boundary layer. The orifices of the survey probe were set normal to the plane formed by the survey probe and the model centerline.

The matrix of pressure signatures generated in the flow field under the model and measured with a Statham differential pressure gage at a Mach number of 2.0 is shown in figure 5.

<u>Separation Distance, in.</u>	<u>Lift/Cruise Lift</u>	<u>Nacelles</u>
9.5	1.0	Large
18.0	1.0	Large
9.5	0.5	Small
18.0	0.5	Small
9.5	1.0	Small
18.0	1.0	Small
9.5	0.5	Off
18.0	0.5	Off
9.5	1.0	Off
18.0	1.0	Off

Figure 5. Separation distances, lift ratios, and type of nacelles during test.

The Lift/Cruise Lift ratio, $C_L/C_{L,CR}$, was 1.0 for a model lift of 6.72 lb. This value was obtained by multiplying the full-scale lift by 1:10000 (scale factor squared), and then by the ratio of wind-tunnel to free-stream dynamic pressures. An additional lift increment was estimated and applied to correct for wing

downwash effects on the sting-balance. The pressure signatures were measured at the two design and off-design lift levels so that the effects of lift versus volume contributions to flow-field disturbances could be identified and studied on a concept of this size and type.

Measured Pressure Signatures

There were two primary areas of interest in the pressure signatures measured from the Langley wind-tunnel model. The first area of interest was how well the model-generated pressure signatures met design expectations, and the second was the relative flow-field disturbance effects of the two different-size nacelles. These two topics will be discussed in the following sections.

Analysis of Pressure Signatures

The sonic-boom design and analysis methods employed to obtain the business-jet concept and its wind-tunnel model evolved through research and wind-tunnel experimentation from the theories of Whitham and Walkden, reference 4 and 5. These are inherently far-field in form while pressure signature development in the environment of the wind tunnel test section where the pressure signatures are measured is near field. However, the nose and forward fuselage section generate only volume disturbances, and the initial section of the wing strake is mostly volume with a very low lift component. So, if the forward section is very slender, it is possible to employ Whitham-Walkden theory to obtain a tentative prediction of this part of the near-field pressure signature. Figure 6 shows a comparison of measured and Whitham-theory predicted pressure signatures at Mach 2, $C_L/C_{L,CR} = 1.0$, and a separation distance of 18 inches.

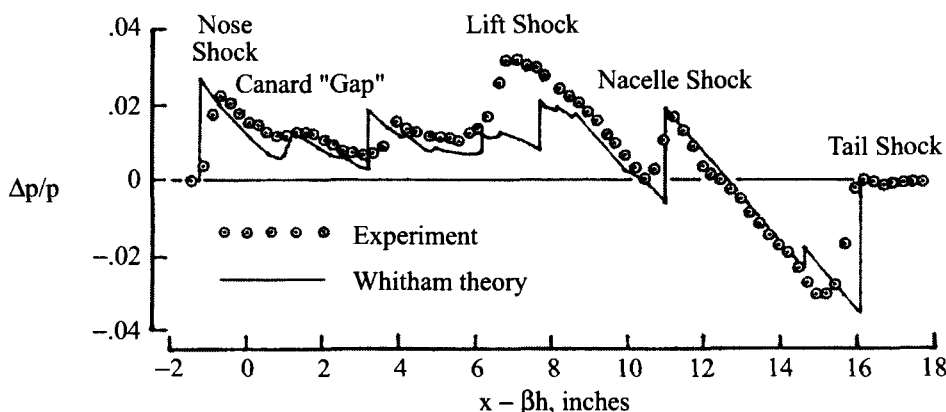


Figure 6. Comparison of measured and predicted pressure signatures. $M = 2$, $C_L/C_{L,CR} = 1.0$, $h = 18$ inches, small nacelles.

The predicted pressure signature is longer than the measured signature which is normal for Whitham theory predictions. Agreement between predicted and measured signatures along the first 7 inches of signature length is fairly good. However, both the predicted nose and canard "gap" shocks are ahead of the corresponding measured pressure rises, and the expansion aft of the nose shock is over-predicted. Serious differences between the predicted and the measured signatures are found where the wing volume and lift begin to grow rapidly. The single measured lift-induced shock is stronger and is further forward than the two weaker predicted shocks. This is typical of Whitham Theory-predicted near-field signatures of lifting wing-body models whose equivalent areas due to lift exceed those from volume by a factor of two or more. At this near-field distance, under-wing pressure disturbances are disproportionately stronger

and have shorter propagation distances than above-the-wing pressure disturbances so they exert a larger influence that they would from a further distance.

The predicted nacelle shock strength and location agrees well with that of the measured signature. Both nacelles are located above and aft of the wing, so their disturbances do not interact with the wing and the wing lift. However, the nacelles are in the flow field disturbed by the upper wing surface. From the good agreement between predicted and measured nacelle inlet-lip shock, it would appear that the air crossing the inlets has nearly free stream velocity. So, on this model, the nacelles behave very much like two separate bodies flying in formation with the wing-fuselage-fin. Note that the nose and nacelle shocks have nearly the same strength. So, in spite of being in an aft position on the fuselage, the nacelle shocks are readily seen on the pressure signature.

The Whitham theory prediction of the ground pressure signature at a Mach number of 2 and a cruise altitude of 53,000 feet is presented in figure 7.

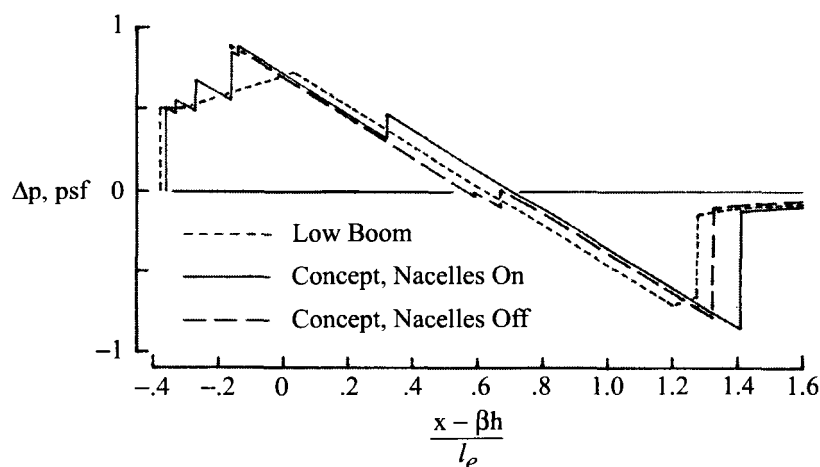


Figure 7. Predicted ground signatures from the business jet concept. $M = 2$, $h = 53,000$ ft.

The nacelle shock is located along the expansion, and before the tail shock. The extraneous “ramp” shocks probably resulted from too coarse a fuselage description and possibly, insufficient low-boom tailoring of the fuselage areas. These “ramp” shocks did not appear in the near-field pressure signatures of references 11 and 19. The models in these references had much higher fineness ratio fuselages, and the corresponding concepts were HSCT-size vehicles.

Relative Disturbances From the Different Nacelles

The second area of interest was the relative effects of large and small nacelles on the pressure signature. In figure 8, three signatures generated by the model with large nacelles, small nacelles, and no nacelles are presented for comparison.

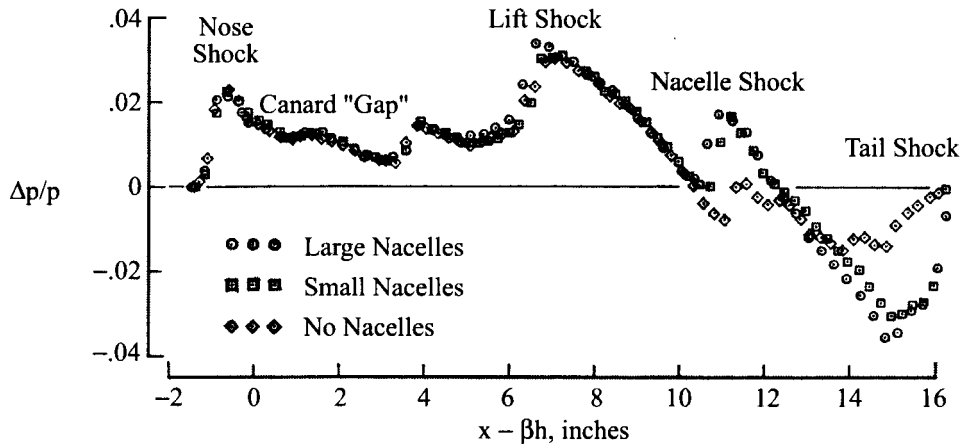


Figure 8. Comparison of pressure signatures at $h = 18$ inches, $M = 2$, $C_L/C_{L,CR} = 1.0$.

Just behind the nose shock is a short shallow expansion followed by a low-strength shock. These features are due to the absence of the canard which had to be omitted from the wind-tunnel model geometry. Nacelle inlet-lip shocks are easily seen on the two pressure signatures from the model with large and small nacelles. Although there is a marked difference in nacelle diameters and lengths, there was very little difference in their inlet-lip shock strengths and locations. The small nacelle-location shock on the signature from the model with no nacelles was due to the nacelle struts which were left in place when the nacelles were removed. Aft of the inlet, expansion fields generated along the length of each nacelle added to the tail shock strength. However, the relative magnitudes of the pressures in the aft region of the three signatures makes it relatively easy to isolate and identify the nacelle volume effects.

These pressure signatures in figure 8 demonstrated that for a supersonic-cruise vehicle the size of a SBJ, nacelle shocks and disturbance effects are just as, if not more, difficult to mask as they are for vehicles in the HSCT size range. Because the lift-to-volume ratio is less on a SBJ, there is a shallower F-function expansion than on the F-function of the larger heavier HSCT. So, the pressure "jump" from the nacelle inlet lip has a smaller "valley" to "hide" in.

While there is a minimum sonic boom theory for the shaping of the configuration's forward 75 to 80 percent, there is only empirical theory for minimizing nacelle effects. References 11 and 20 suggest a nacelle location in the expansion field of the concept's F-function, and this idea was used on the SBJ concept. Beyond coupling this idea with the use of a small inlet diameter and a shallow inlet lip angle, there are no other theoretically and experimentally-validated methods for controlling and reducing the tail shock in a manner similar to that of the nose shock. This is an area open for study.

A third area of interest was the relative effects of the volume and lift on the shape of the signature. A comparison of two pressure signature generated by the model, without nacelles, at Mach 2 and separation distance of 18 inches is presented in figures 9.

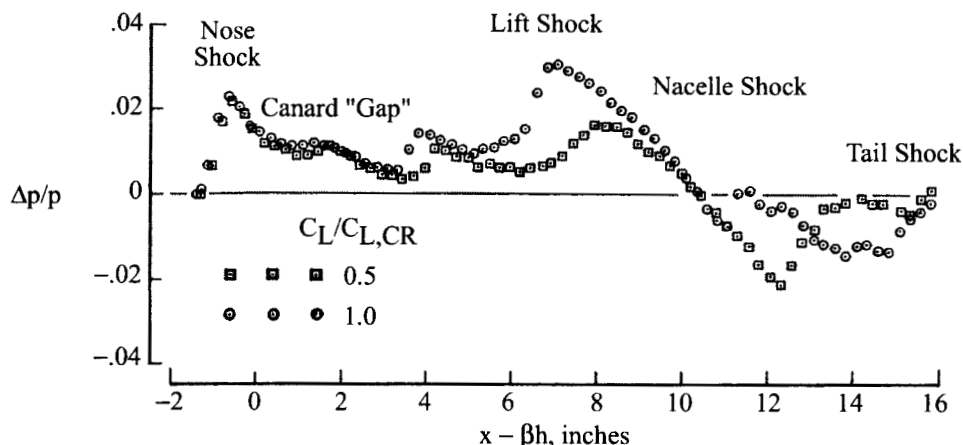


Figure 9. Comparison of two wind-tunnel model pressure signatures. $M = 2$, $h = 18$ inches, no nacelles, $C_L/C_{L,CR} = 0.5$ and 1.0 .

The nose shock and forebody disturbances have the same shapes and strengths at both levels of $C_L/C_{L,CR}$. Differences between the two pressure signatures appear aft of the canard location where the wing lift begins. For $C_L/C_{L,CR} = 1.0$, the lift-induced shock is forward of, and stronger than, the lift-induced shock for $C_L/C_{L,CR} = 0.50$. The same observation is true for the respective shocks off the trailing edges of the wing and aft fuselage. These shock locations differ because of the difference in angle of attack required to achieve the two lift levels.

Results

Pressure signatures generated by a Langley wind-tunnel model of a SBJ concept have been measured in test section of the Unitary Plan Wind Tunnel at a Mach number of 2, separation distances of 9.5 and 18 inches, and at $C_L/C_{L,CR}$ ratios of 0.5 and 1.0. An analysis of the data showed that the disturbances from the nacelles were just as difficult to submerge in the flow-field expansion region of a supersonic-cruise business jet as they were in the same flow-field region of a 300-passenger transport. The lower beginning-cruise weight of concept resulted in a shallower expansion following the peak in volume and lift before the development of the tail shock. From this perspective, the task of designing low-boom characteristics into the concept's geometry has not been made easier simply because there has been a reduction in concept size and weight. In spite of this, however, the strength of the nacelle shock in the ground signature was predicted to be so small that it would probably go unnoticed to the observer.

Concluding Remarks

The measured and predicted pressure signatures of the Langley wind-tunnel model showed that reducing the size of the supersonic-cruise, low-sonic-boom vehicle from HSCT to SBJ size did not make it easier to meet low-boom requirements. Three factors were involved: (1) the desired overpressure limits, which were reduced from 1.0 psf to 0.5 psf; (2) the mission range, which was still long at 4000 nautical miles; (3) propulsion and materials technology, which had changed very little during the intervening years.

Decreasing the overpressure limits added to the conflicts between choices to achieve high aerodynamic efficiency and compromises to achieve low sonic boom. Specifically, the need for both high

aspect ratio, 1.9 to 2.1, and long lifting length resulted in low wing loadings and/or penalties in structural weight.

A mission range of 4000 nautical miles meant that the concept was a flying fuel tank as well as a high-speed conveyance for 10 business passengers. This affected the design by requiring the fuselage to be long enough to carry crew, passengers, baggage, and most of the volume for the fuel tanks. While low-sonic-boom characteristics were helped by this design feature, the weight penalties accumulated with each foot of length added. However, to maintain trans-Atlantic and/or two-jump trans-Pacific capabilities, this much range was required.

References

1. Mack, Robert J.: *A Supersonic-Cruise Business-Jet Concept Designed For Low Sonic Boom*, NASA/TM-2003-212435, August 2003.
2. Seebass, R.; and George, A. R.: *Sonic-Boom Minimization*. Journal of the Acoustical Society of America, vol. 51, no. 2, pt. 3, February 1972, pp. 686 - 694.
3. Jones, L. B.: *Lower Bounds For Sonic Bangs*. Journal of the Royal Aeronautical Society, vol. 65, no. 606, June 1961, pp. 433 - 436.
4. Whitham, G. B.: *The Flow Pattern of a Supersonic Projectile*. Communications on Pure and Applied Mathematics vol. V, no. 3, August 1952, pp. 301-348.
5. Walkden, F.: *The Shock Pattern of a Wing-Body Combination, Far From the Flight Path*. Aeronautical Quarterly, vol. IX, pt. 2, May 1958, pp. 164-194.
6. McLean, F. Edward: *Some Nonasymptotic Effects On the Sonic Boom of Large Airplanes*. NASA TN D-2877. June 1965.
7. Carlson, Harry W.; Barger, Raymond L.; and Mack, Robert J.: *Application Of Sonic-Boom Minimization Concepts In Supersonic Transport Design*. NASA TN D-7218, June 1973.
8. Darden, Christine M.: *Sonic Boom Minimization With Nose-Bluntness Relaxation*. NASA TP-1348, 1979.
9. Mack, Robert J.; and Haglund, George T.: *A Practical Low-Boom Overpressure Signature Based On Minimum Sonic Boom Theory*. High-Speed Research: Sonic Boom, Volume II, NASA Conference Publication 3173, 1992.
10. Mack, Robert J.: *Additional F-Functions Useful For Preliminary Design Of Shaped-Signature, Low-Boom, Supersonic-Cruise Aircraft*. High-Speed Research: 1994 Sonic Boom Workshop, NASA/CP-1999-209699, December 1999.
11. Mack, Robert J.: *Some Considerations On The Integration Of Engine Nacelles Into Low-Boom Aircraft Concepts*. High-Speed Research: Sonic Boom, Volume II, NASA Conference Publication 3173, 1992.

12. Mack, Robert J.; and Needleman, Kathy: *A Methodology For Designing Aircraft To Low Sonic Boom Constraints*. NASA TM 4246, 1991.
13. Mack, Robert J.; and Needleman, Kathy: *A Semiempirical Method For Obtaining Fuselage Normal Areas From Fuselage Mach Sliced Areas*. NASA TM 4228, 1990.
14. Mack, Robert J.: *A Rapid Empirical Method For Estimating The Gross Takeoff Weight Of A High Speed Civil Transport*. NASA / TM-1999-209535, December 1999.
15. Harris, Roy V., Jr.: *A Numerical Technique For Analysis Of Wave Drag At Lifting Conditions*. NASA TN D-3586, 1966.
16. Carlson, Harry W.; and Mack, Robert J.: *Estimation Of Wing Nonlinear Aerodynamic Characteristics at Supersonic Speeds*. NASA TP-1718, 1980.
17. Shrout, Barrett L.: *Extension Of A Numerical Solution For The Aerodynamic Characteristics Of A Wing To Include A Canard Or Horizontal Tail*. Paper presented at AGARD Specialists Meeting on Aerodynamic Interference (Silver Springs, MD.), September 1970.
18. Mack, Robert J.: *A Numerical Method For Evaluation And Utilization Of Supersonic Nacelle-Wing Interference*. NASA TN D-5057, 1969.
19. Mack, Robert J.: *Wind-Tunnel Overpressure Signatures From A Low-Boom HSCT Concept With Aft-Fuselage-Mounted Engines*. High-Speed Research: 1994 Sonic Boom Workshop, Configuration Design, Analysis, and Testing. NASA / CP-1999-209699, December 1999.
20. Mack, Robert J.: *Low-Boom Aircraft Concept With Aft-Fuselage-Mounted Engine Nacelles*. High-Speed Research: Sonic Boom, Volume II, NASA Conference Publication 10133, 1993.

Appendix A

Low-Boom Parameters for an Equivalent-Area Distribution and the Corresponding F-function on the Langley, Supersonic-Cruise, Low-Boom Business-Jet Concept

Mach Number, $M = 2.0$
 Beginning-Cruise Altitude, $h = 53,000$ ft
 "Nose-Bluntness" Length, $y = 6.0$ ft
 "Flat-Top" Section of F-Function, $\xi - y = 10.0$ ft
 Beginning-Cruise Weight, $W_c = 88,457.0$ lb
 "Low-Boom, Equivalent-Area" Cruise Weight, $W_{eff} = 92,809.4$ lb
 Effective Length, $l_e = l_{ep} = 111.0$
 Ground Overpressure, $\Delta p = 0.5$ psf
 $\eta = 0.35$
 Ground Reflection Factor, $RF = 1.9$

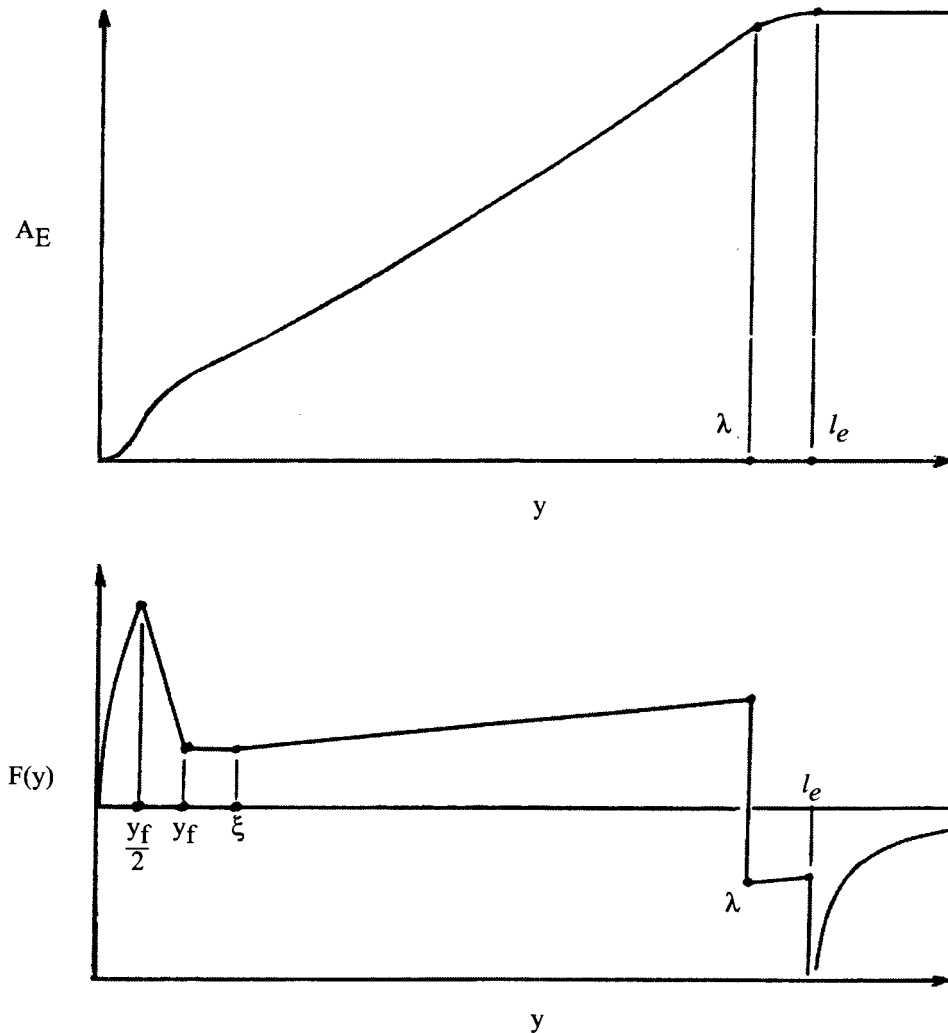


Figure A.1. Equivalent area and F-function calculated from cruise data.

Appendix B

Characteristics of the Langley low-sonic-boom supersonic-cruise business jet which were scaled by 1:100 to obtain the wind-tunnel model.

Span, ft	55.0
Length, ft	132.5
Wing Area (reference), ft ²	1,560.25
Wing Mean Aerodynamic chord, ft	42.00
Wing Aspect Ratio (projected area)	1.93
Fin Area, ft ²	109.0
Canard Area (projected), ft ²	90.0
Cruise Mach Number	2.0
Beginning Cruise Weight, lb	88,497.0

REPORT DOCUMENTATION PAGE					<i>Form Approved</i> OMB No. 0704-0188							
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.												
1. REPORT DATE (DD-MM-YYYY) 01 10 2003		2. REPORT TYPE Technical Memorandum		3. DATES COVERED (From To)								
4. TITLE AND SUBTITLE An Analysis of Measured Sonic-Boom Pressure Signatures From a Langley Wind-Tunnel Model of a Supersonic-Cruise Business Jet Concept				5a. CONTRACT NUMBER								
				5b. GRANT NUMBER								
				5c. PROGRAM ELEMENT NUMBER								
6. AUTHOR(S) Mack, Robert J.				5d. PROJECT NUMBER								
				5e. TASK NUMBER								
				5f. WORK UNIT NUMBER 23-706-92-02								
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) NASA Langley Research Center Hampton, VA 23681-2199				8. PERFORMING ORGANIZATION REPORT NUMBER L 18069								
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001				10. SPONSOR/MONITOR'S ACRONYM(S) NASA								
				11. SPONSOR/MONITOR'S REPORT NUMBER(S) NASA/TM-2003-212447								
12. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified Unlimited Subject Category 05 Availability: NASA CASI (301) 621-0390 Distribution: Standard												
13. SUPPLEMENTARY NOTES An electronic version can be found at http://techreports.larc.nasa.gov/ltrs/ or http://ntrs.nasa.gov												
14. ABSTRACT <p>Pressure signatures generated by the wind-tunnel model of a Business-Jet Concept were measured at a Mach number of 2, at (lift/cruise lift) ratios of 0.5 and 1.0, and at separation distances of 9.5 and 18 inches. Analysis of the pressure signature data showed the engine-nacelle disturbances were as difficult to "hide" in the flow-field of a 10-passenger cupersonic-cruise business jet as they were in the similar part of the flow-field of a 300-passenger supersonic-cruise transport. This result indicated that it was more, not less, difficult to tailor the business-jet concept's geometry for sonic boom overpressures that were half those required of the much larger transport aircraft.</p>												
15. SUBJECT TERMS Sonic boom; Wind-tunnel tests; Measured pressure signatures; Low-boom business jet												
16. SECURITY CLASSIFICATION OF <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="padding: 2px;">a. REPORT</td> <td style="padding: 2px;">b. ABSTRACT</td> <td style="padding: 2px;">c. THIS PAGE</td> </tr> <tr> <td style="text-align: center; padding: 2px;">U</td> <td style="text-align: center; padding: 2px;">U</td> <td style="text-align: center; padding: 2px;">U</td> </tr> </table>			a. REPORT	b. ABSTRACT	c. THIS PAGE	U	U	U	17. LIMITATION OF ABSTRACT UU		18. NUMBER OF PAGES 19	
a. REPORT	b. ABSTRACT	c. THIS PAGE										
U	U	U										
			19a. NAME OF RESPONSIBLE PERSON STI Help Desk (email: help@sti.nasa.gov) 19b. TELEPHONE NUMBER (Include area code) (301) 621-0390									